




Richpeace[®]

Richpeace Automatic Perforation and Embroidery Sewing machine

RPCE-L-P+E+S-1-900×600-B-P6+F9+IS2-VR1, VR2-LH50-AO-1P220


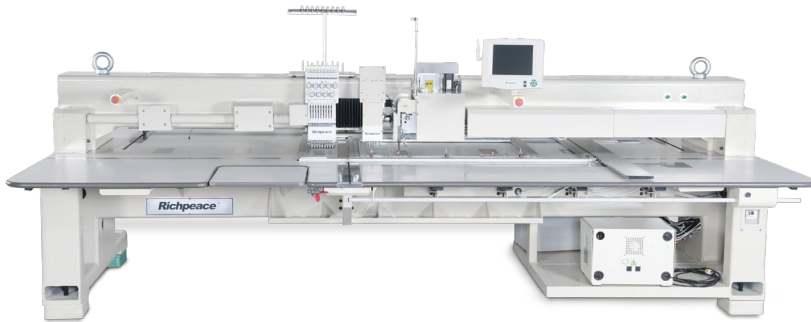


Features

1. Machine sewing area: 900x600mm (other sewing area can be customized).
2. Spindle drive and sewing frame drive are driven by servo motor, independently controlled.
3. Independent research and development of electromechanics to meet customer's customization function.
4. Independently developed intelligent punching and embroidery sewing layout software, which is conducive to one-time forming.
5. Bridge type structure, stable frame, large sewing area, can make any flower shape.
6. Equipped with automatic dust-absorbing equipment and device to remove dander.
7. Automatic oil supply system to improve the service life of the equipment and reduce manual maintenance.
8. Sewing with twice as big rotary shuttle, embroidery double rotary, original imported Japanese rotary shuttle.
9. Sewing head can be automatically lifted to prevent crashing into the frame, anti-dislodging function.
10. Special multi-functional frame can meet the processing of different thickness leather and composite leather.

Application

Suitable for sewing car seats, car headrests and car armrest boxes.

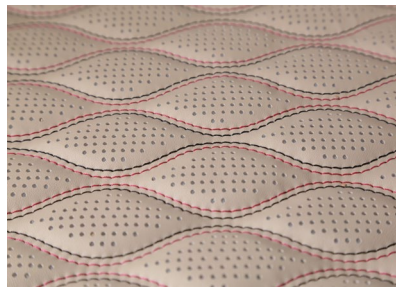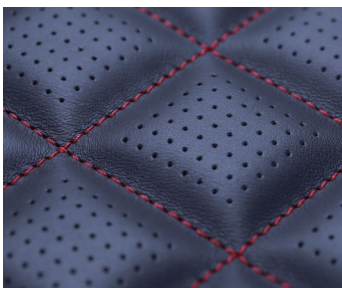

Parameters

Maximum sewing speed	1000 stitches/minute (800-1000 stitches/minute recommended for leather sewing)		
Maximum punching speed	800 holes/min (800-1200 holes/min recommended for complicated)		
Stitchlength	0.1-12.7mm		
Punchneedle size	0.8MM, 1.0MM, 1.2MM, 1.5MM, 2.0MM, 2.5MM Circular		
Sewing needle	18# , 21# , 23#	Embroidery	Motorized thread cutting
Needle for embroidery	11#	Sewing	Pneumatic thread cutting
Clamping method	Three layers of hinges embroidery frame clip material	Stitch type	Lockstitch
Sewinghead lift Height	50mm	Power	Three-phase 220V/50Hz
Floor space (L×W×H)	4193mm×2100mm×1650mm	Power/air	5.5kW/0.4Mpa

RICHPEACE AMERICA
www.richpeaceamerica.com
marketing@richpeaceamerica.com

4220 Steve Reynolds Blvd. Suite 14
 Norcross, GA 30093