




Richpeace[®]

Richpeace Automatic Multi-head Perforation Machine (6-size Fixed Head)



Each head has six specifications of round hole punchers that can be freely switched, and more patterns can be done.




Any punching needle can be changed to the drawing pen with its punching function off as default.

Model : RPCE-L-P-4-1200×800-B-P6-0-NA-3P380



Model : RPCE-L-P-2-900×600-B-P6-0-NA-3P380

- Optional single head, double heads or multi-head can be chosen for production, with double efficiency or more.
- Exclusive perforation head and punching needle bar mechanism.
- Side-discharged punching needle bar, avoids the scrap blocked, and ensures free falling.

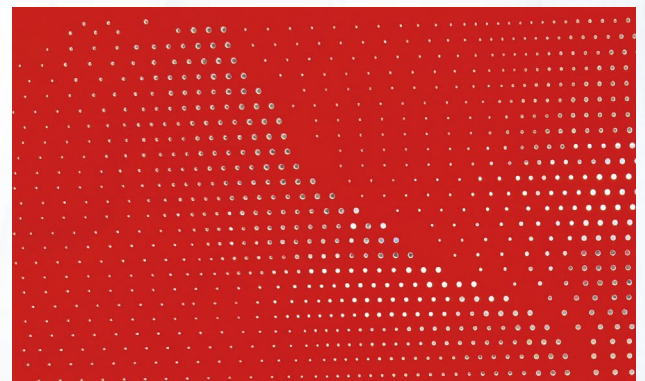

RICHPEACE AMERICA
www.richpeaceamerica.com
marketing@richpeaceamerica.com

4220 Steve Reynolds Blvd.
Suite 14
Norcross, GA 30093




Richpeace Automatic Multi-head Perforation Machine (6-size Fixed Head)

Machine features

1. Exclusive perforation head and punching needle bar mechanism, and enhanced needle bar reciprocator. Side-discharged punching needle bar case, efficiently prevents the scraps blocking, and ensures free falling.
2. Puncher size: 0.8mm, 1.0mm, 1.2mm, 1.5mm, 2.0mm, 2.5mm. Free combination to different designs.
3. Max. working speed: 1000 holes / min.
4. Powerful industrial vacuum cleaner, smooth and clean.
5. Optional QR code scanning function, it can easily read files, avoid mistake, and improve work efficiency.
6. Optional automatic bottom PP tape feeding device, auto-switching and speed adjustable, with tape breakage detection, can ensure the perforation effect and accuracy, and prolong the service life of the punching needle.

Application

Suitable for car seat, foot pad, aerospace seat, furniture, sports shoes, leather shoes, leather coat, leather bag, and etc.

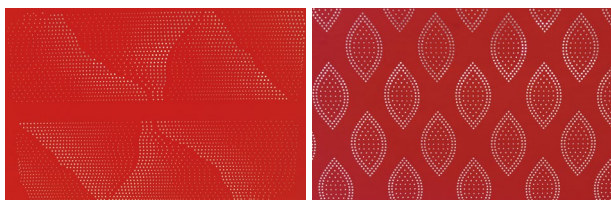

Machine configuration



Side-discharged punch needle bar case




Richpeace Electronic Control System



Three-layer material holding gauge



Industrial vacuum cleaner

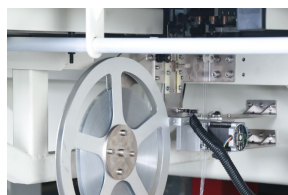

Automatic Bottom PP tape feeding Device(optional)



QR scanning function(optional)

Model

Model	Head number	Punching needles	Working area	Machine size(L × W × H)
RPCE-L-P-1-900 × 600-B-P6-0-NA-3P380	1	6	900mm × 600mm	3453mm × 2100mm × 1215mm
RPCE-L-P-2-900 × 600-B-P6-0-NA-3P380	2	6	900mm × 600mm	4653mm × 2100mm × 1215mm
RPCE-L-P-4-900 × 600-B-P6-0-NA-3P380	4	6	900mm × 600mm	7023mm × 2100mm × 1215mm
RPCE-L-P-1-1200 × 800-B-P6-0-NA-3P380	1	6	1200mm × 800mm	4796mm × 2500mm × 1215mm
RPCE-L-P-2-1200 × 800-B-P6-0-NA-3P380	2	6	1200mm × 800mm	5786mm × 2500mm × 1215mm
RPCE-L-P-4-1200 × 800-B-P6-0-NA-3P380	4	6	1200mm × 800mm	8253mm × 2500mm × 1215mm

Machine parameter

Max. speed	1000 holes / min
Punching Needle size	Round needle size: 0.8mm, 1.0mm, 1.2mm, 1.5mm, 2.0mm, 2.5mm.
Power Supply	Three phase 380V/50HZ
Power and Air Pressure	1.0kW, 0.6Mpa